



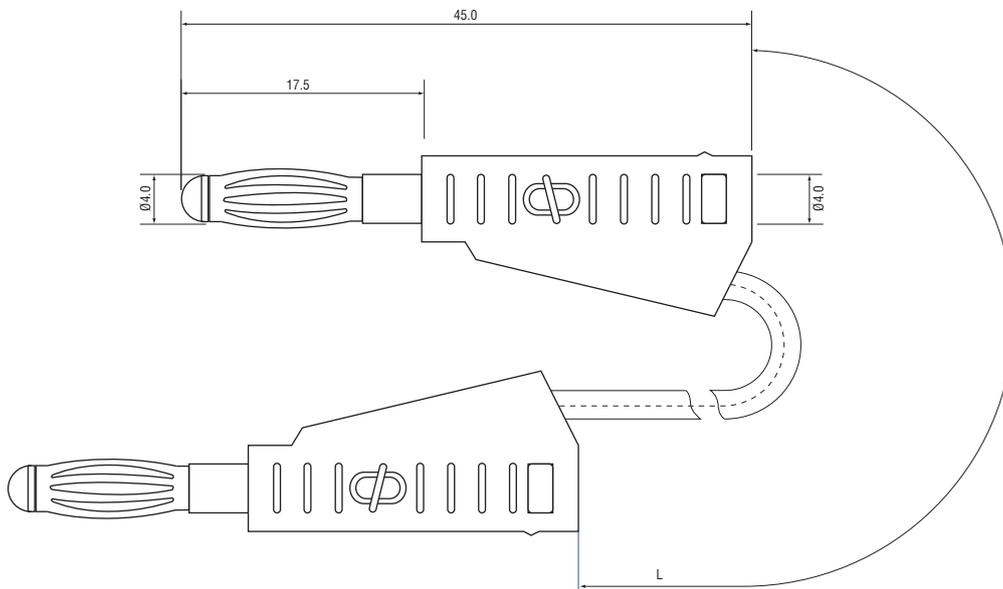

## 4mm Stackable test lead – 500mm

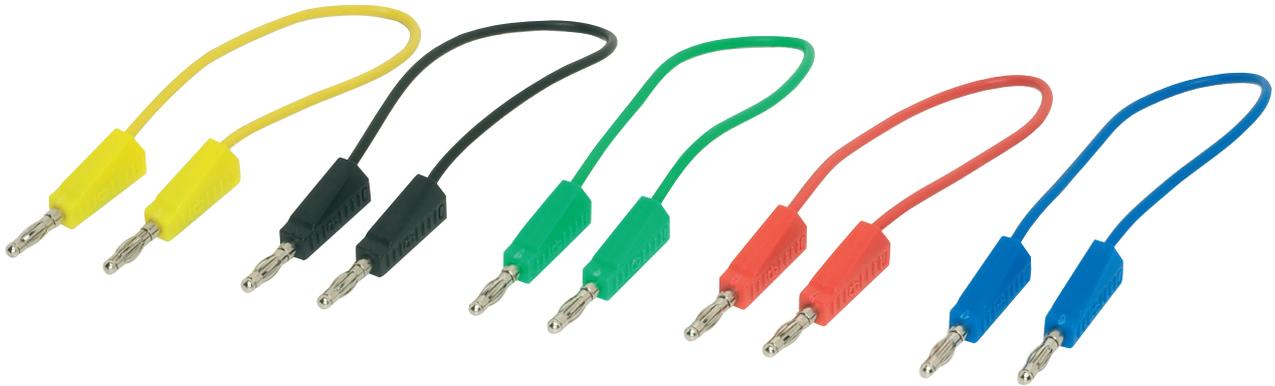

Flexible test lead with 4mm stackable plug.

### Material:

- Surface treatment: gold or nickel

### Ratings:

- Rated voltage & current:  
0.75mm<sup>2</sup>: 30V<sub>ac</sub> - 60V<sub>dc</sub>/max. 19A