LOUDITY

SPECIFICATION SHEET


Туре	Unit	LD-BZEN-1205
Rated voltage	V	5
Operating Voltage	V	3-8
*Rated Current(MAX)	mA	40
* Min Sound Output at 10 cm	dB	85
Coil Resistance	Ω	47±5
*Resonant Frequency	Hz	2400
Operating Temperature	° C	-20 - +70
Storage Temperature	° C	-30 - +80
Housing Material		NORYL
Weight	g	2

*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)

DIMENSIONS

UNIT:mm

Tolerance: ± 0.5 mm

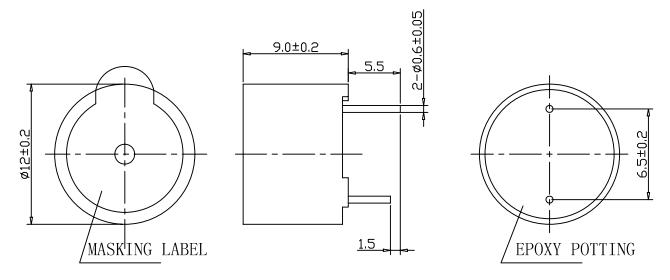

Wave Solder And Wash Allowed