


Wire-wound Ceramic Cased Resistors 5 W, SR Passives

SRPASSIVES



Resistor type	wire-wound ceramic case
Power	5 W
Tolerance	±5%
Mounting	THT
Body dimensions	9.5 x 9.5 x 22 mm
Leads dimensions	Ø0.8 x 35 mm

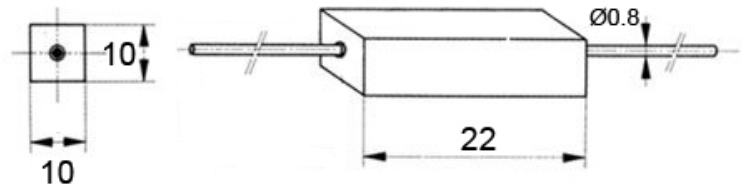

Symbol	Resistance [Ω]
CRL5W-R1	100 m
CRL5W-R12	120 m
CRL5W-R15	150 m
CRL5W-R18	180 m
CRL5W-R22	220 m
CRL5W-R27	270 m
CRL5W-R33	330 m
CRL5W-R39	390 m
CRL5W-R47	470 m
CRL5W-R56	560 m
CRL5W-R68	680 m
CRL5W-R82	820 m
CRL5W-1R	1
CRL5W-1R2	1.2
CRL5W-1R5	1.5
CRL5W-1R8	1.8
CRL5W-2R2	2.2
CRL5W-2R7	2.7
CRL5W-3R3	3.3
CRL5W-3R9	3.9
CRL5W-4R7	4.7
CRL5W-5R6	5.6
CRL5W-6R8	6.8
CRL5W-8R2	8.2
CRL5W-10R	10
CRL5W-12R	12
CRL5W-15R	15
CRL5W-18R	18

Symbol	Resistance [Ω]
CRL5W-22R	22
CRL5W-27R	27
CRL5W-33R	33
CRL5W-39R	39
CRL5W-47R	47
CRL5W-56R	56
CRL5W-68R	68
CRL5W-82R	82
CRL5W-100R	100
CRL5W-120R	120
CRL5W-150R	150
CRL5W-180R	180
CRL5W-220R	220
CRL5W-270R	270
CRL5W-330R	330
CRL5W-390R	390
CRL5W-470R	470
CRL5W-560R	560
CRL5W-680R	680
CRL5W-820R	820
CRL5W-1K	1 k
CRL5W-1K2	1.2 k
CRL5W-1K5	1.5 k
CRL5W-1K8	1.8 k
CRL5W-2K2	2.2 k
CRL5W-2K7	2.7 k
CRL5W-3K3	3.3 k
CRL5W-3K9	3.9 k

Symbol	Resistance [Ω]
CRL5W-4K7	4.7 k
CRL5W-5K6	5.6 k
CRL5W-6K8	6.8 k
CRL5W-8K2	8.2 k
CRL5W-10K	10 k
CRL5W-12K	12 k
CRL5W-15K	15 k
CRL5W-18K	18 k
CRL5W-22K	22 k
CRL5W-27K	27 k
CRL5W-33K	33 k
CRL5W-39K	39 k
CRL5W-47K	47 k
CRL5W-56K	56 k
CRL5W-68K	68 k
CRL5W-82K	82 k
CRL5W-100K	100 k
CRL5W-120K	120 k
CRL5W-150K	150 k
CRL5W-180K	180 k
CRL5W-220K	220 k
CRL5W-270K	270 k
CRL5W-330K	330 k
CRL5W-390K	390 k
CRL5W-470K	470 k
CRL5W-560K	560 k
CRL5W-680K	680 k
CRL5W-820K	820 k