



Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

General Description

The MAX6161–MAX6168 are precision, low-dropout, micropower voltage references. These three-terminal devices operate with an input voltage range from ($V_{OUT} + 200mV$) to 12.6V and are available with output voltage options of 1.25V, 1.8V, 2.048V, 2.5V, 3V, 4.096V, 4.5V, and 5V. They feature a proprietary curvature-correction circuit and laser-trimmed thin-film resistors that result in a very low temperature coefficient of 5ppm/ $^{\circ}C$ (max) and an initial accuracy of $\pm 2mV$ (max). Specifications apply to the extended temperature range (-40 $^{\circ}C$ to +85 $^{\circ}C$).

The MAX6161–MAX6168 typically draw only 100 μA of supply current and can source 5mA (4mA for MAX6161) or sink 2mA of load current. Unlike conventional shunt-mode (two-terminal) references that waste supply current and require an external resistor, these devices offer a supply current that is virtually independent of the supply voltage (8 $\mu A/V$ variation) and do not require an external resistor. Additionally, the internally compensated devices do not require an external compensation capacitor. Eliminating the external compensation capacitor saves valuable board area in space-critical applications. A low-dropout voltage and a supply-independent, ultra-low supply current make these devices ideal for battery-operated, high-performance, low-voltage systems.

The MAX6161–MAX6168 are available in 8-pin SO packages.

Applications

Analog-to-Digital Converters (ADCs)

Portable Battery-Powered Systems

Notebook Computers

PDAs, GPS, DMMs

Cellular Phones

Precision +3V/+5V Systems

Features


- ◆ **$\pm 2mV$ (max) Initial Accuracy**
- ◆ **5ppm/ $^{\circ}C$ (max) Temperature Coefficient**
- ◆ **5mA Source Current at 0.9mV/mA**
- ◆ **2mA Sink Current at 2.5mV/mA**
- ◆ **Stable with 1 μF Capacitive Loads**
- ◆ **No External Capacitor Required**
- ◆ **100 μA (typ) Quiescent Supply Current**
- ◆ **200mV (max) Dropout at 1mA Load Current**
- ◆ **Output Voltage Options: 1.25V, 1.8V, 2.048V, 2.5V, 3V, 4.096V, 4.5V, 5V**

Ordering Information

PART*	TEMP RANGE	PIN-PACKAGE	OUTPUT VOLTAGE (V)
MAX6161_ESA	-40 $^{\circ}C$ to +85 $^{\circ}C$	8 SO	1.250
MAX6162_ESA	-40 $^{\circ}C$ to +85 $^{\circ}C$	8 SO	2.048
MAX6163_ESA	-40 $^{\circ}C$ to +85 $^{\circ}C$	8 SO	3.000
MAX6164_ESA	-40 $^{\circ}C$ to +85 $^{\circ}C$	8 SO	4.096
MAX6165_ESA	-40 $^{\circ}C$ to +85 $^{\circ}C$	8 SO	5.000
MAX6166_ESA	-40 $^{\circ}C$ to +85 $^{\circ}C$	8 SO	2.500
MAX6167_ESA	-40 $^{\circ}C$ to +85 $^{\circ}C$	8 SO	4.500
MAX6168_ESA	-40 $^{\circ}C$ to +85 $^{\circ}C$	8 SO	1.800

*Insert the code for the desired initial accuracy and temperature coefficient (from the Selector Guide) in the blank to complete the part number.

Pin Configuration

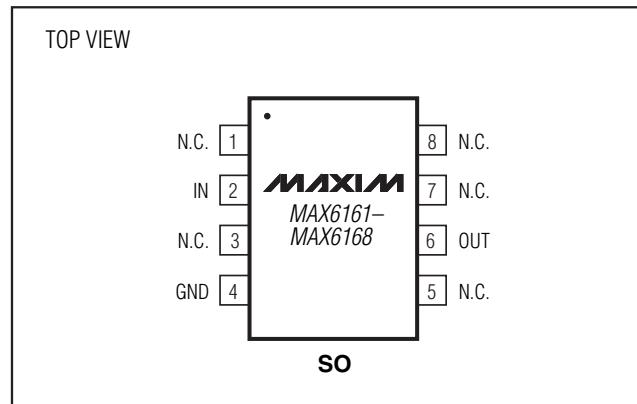

Typical Operating Circuit and Selector Guide appear at end of data sheet.



MAX6161–MAX6168

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

ABSOLUTE MAXIMUM RATINGS

Voltages Referenced to GND

IN	-0.3 to +13.5V
OUT	-0.3V to (VIN + 0.3V)
Output Short-Circuit Duration to GND or IN (VIN ≤ 6V)	...Continuous
Output Short-Circuit Duration to GND or IN (VIN > 6V)	60s

Continuous Power Dissipation (TA = +70°C)

8-Pin SO (derate 5.88mW/°C above +70°C).....471mW

Operating Temperature Range-40°C to +85°C

Storage Temperature Range.....-65°C to +150°C

Lead Temperature (soldering, 10s).....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—MAX6161 (VOUT = 1.25V)

(VIN = +5V, IOUT = 0, TA = TMIN to TMAX, unless otherwise specified. Typical values are at TA = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	VOUT	TA = +25°C	MAX6161A	1.248	1.250	1.252
			MAX6161B	1.246	1.250	1.254
Output Voltage Temperature Coefficient (Note 2)	TCVOUT	MAX6161A		4	10	ppm/°C
		MAX6161B		6	15	
Line Regulation	ΔVOUT/ΔVIN	2.5V ≤ VIN ≤ 12.6V		12	150	μV/V
Load Regulation	ΔVOUT/ΔIOUT	Sourcing: 0 ≤ IOUT ≤ 4mA		0.5	0.9	mV/mA
		Sinking: -2mA ≤ IOUT ≤ 0		1.3	2.5	
OUT Short-Circuit Current	ISC	Short to GND		110		mA
		Short to IN		25		
Long-Term Stability	ΔVOUT/time	1000hr at +25°C		115		ppm/1000hr
Output Voltage Hysteresis (Note 3)	ΔVOUT/cycle			125		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	eOUT	f = 0.1Hz to 10Hz		20		μVp-p
		f = 10Hz to 10kHz		15		μVRMS
Ripple Rejection	VOUT/VIN	VIN = +5V ± 100mV, f = 120Hz		80		dB
Turn-On Settling Time	tR	VOUT to 0.1% of final value, COUT = 50pF		50		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	VIN	Guaranteed by line-regulation test	2.5	12.6		V
Quiescent Supply Current	IIN		125	150		μA
Change in Supply Current	ΔIIN/ΔVIN	2.5V ≤ VIN ≤ 12.6V	3.2	8.0		μA/V

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6168 (V_{OUT} = 1.800V)

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V _{OUT}	T _A = +25°C	MAX6168A	1.798	1.800	1.802
			MAX6168B	1.795	1.800	1.805
Output Voltage Temperature Coefficient (Note 2)	TC _{VOUT}	MAX6168A		2	5	ppm/°C
		MAX6168B		4	10	
Line Regulation	ΔV _{OUT} / ΔV _{IN}	2.5V ≤ V _{IN} ≥ 12.6V		42	200	μV/V
Load Regulation	ΔV _{OUT} / ΔI _{OUT}	Sourcing: 0 ≤ I _{OUT} ≤ 5mA		0.5	0.9	mV/mA
		Sinking: -2mA ≤ I _{OUT} ≤ 0		1.5	4	
I _{OUT} Short-Circuit Current	I _{SC}	Short to GND		110		mA
		Short to IN		25		
Long-Term Stability	ΔV _{OUT} / time	1000hr at +25°C		80		ppm/ 1000hr
Output Voltage Hysteresis (Note 3)	ΔV _{OUT} / cycle			125		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e _{OUT}	f = 0.1Hz to 10Hz		22		μVp-p
		f = 10Hz to 10kHz		25		μVRMS
Ripple Rejection	ΔV _{OUT} / ΔV _{IN}	V _{IN} = +5V ±100mV, f = 120Hz		78		dB
Turn-On Settling Time	t _R	V _{OUT} to 0.1% of final value, C _{OUT} = 50pF		100		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V _{IN}	Guaranteed by line-regulation test	2.5	12.6		V
Quiescent Supply Current	I _{IN}			100	120	μA
Change in Supply Current	ΔI _{IN} /ΔV _{IN}	2.5V ≤ V _{IN} ≤ 12.6V	3.4	8.0		μA/V

MAX6161–MAX6168

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6162 (V_{OUT} = 2.048V)

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V _{OUT}	T _A = +25°C	MAX6162A	2.046	2.048	2.050
			MAX6162B	2.043	2.048	2.053
Output Voltage Temperature Coefficient (Note 2)	TCV _{OUT}	MAX6162A		2	5	ppm/°C
		MAX6162B		4	10	
Line Regulation	ΔV _{OUT} /	2.5V ≤ V _{IN} ≤ 12.6V		42	250	µV/V
Load Regulation	ΔV _{OUT} / ΔI _{OUT}	Sourcing: 0 ≤ I _{OUT} ≤ 5mA		0.5	0.9	mV/mA
		Sinking: -2mA ≤ I _{OUT} ≤ 0		1.5	4	
OUT Short-Circuit Current	I _{SC}	Short to GND		110		mA
		Short to IN		25		
Long-Term Stability	ΔV _{OUT} / time	1000hr at +25°C		80		ppm/ 1000hr
Output Voltage Hysteresis (Note 3)	ΔV _{OUT} / cycle			125		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e _{OUT}	f = 0.1Hz to 10Hz		22		µVp-p
		f = 10Hz to 10kHz		25		µVRMS
Ripple Rejection	V _{OUT} /V _{IN}	V _{IN} = 5V ±100mV, f = 120Hz		78		dB
Turn-On Settling Time	t _R	V _{OUT} to 0.1% of final value, C _{OUT} = 50pF		100		µs
INPUT CHARACTERISTICS						
Supply Voltage Range	V _{IN}	Guaranteed by line-regulation test	2.5	12.6		V
Quiescent Supply Current	I _{IN}		100	120		µA
Change in Supply Current	ΔI _{IN} /ΔV _{IN}	2.5V ≤ V _{IN} ≤ 12.6V	3.4	8.0		µA/V

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6166 (V_{OUT} = 2.500V)

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V _{OUT}	T _A = +25°C	MAX6166A	2.498	2.500	2.502	V
			MAX6166B	2.495	2.500	2.505	
Output Voltage Temperature Coefficient (Note 2)	TCV _{OUT}	MAX6166A		2	5	ppm/°C	
		MAX6166B		4	10		
Dropout Voltage (Note 4)	V _{IN} - V _{OUT}	I _{OUT} = 1mA		50	200	mV	
Line Regulation	ΔV _{OUT} / ΔV _{IN}	V _{OUT} + 0.2V ≤ V _{IN} ≤ 12.6V		60	250	μV/V	
Load Regulation	ΔV _{OUT} / ΔI _{OUT}	Sourcing: 0 ≤ I _{OUT} ≤ 5mA		0.5	0.9	mV/mA	
		Sinking: -2mA ≤ I _{OUT} ≤ 0		1.6	5		
OUT Short-Circuit Current	I _{SC}	Short to GND		110	mA		
		Short to IN		25			
Long-Term Stability	ΔV _{OUT} / time	1000hr at +25°C		80	ppm/ 1000hr		
Output Voltage Hysteresis (Note 3)	ΔV _{OUT} / cycle			125	ppm		
DYNAMIC CHARACTERISTICS							
Noise Voltage	e _{OUT}	f = 0.1Hz to 10Hz		27	μVp-p		
		f = 10Hz to 10kHz		30	μVRMS		
Ripple Rejection	V _{OUT} /V _{IN}	V _{IN} = 5V ±100mV, f = 120Hz		76	dB		
Turn-On Settling Time	t _R	V _{OUT} to 0.1% of final value, C _{OUT} = 50pF		115	μs		
INPUT CHARACTERISTICS							
Supply Voltage Range	V _{IN}	Guaranteed by line-regulation test		V _{OUT} + 0.2	12.6	V	
Quiescent Supply Current	I _{IN}			100	120	μA	
Change in Supply Current	ΔI _{IN} /ΔV _{IN}	V _{OUT} + 0.2V ≤ V _{IN} ≤ 12.6V		3.2	8.0	μA/V	

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6163 (V_{OUT} = 3.000V)

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V _{OUT}	T _A = +25°C	MAX6163A	2.998	3.000	3.002
			MAX6163B	2.995	3.000	3.005
Output Voltage Temperature Coefficient (Note 2)	TCV _{OUT}	MAX6163A		2	5	ppm/°C
		MAX6163B		4	10	
Dropout Voltage (Note 4)	V _{IN} - V _{OUT}	I _{OUT} = 1mA		50	200	mV
Line Regulation	ΔV _{OUT} / ΔV _{IN}	V _{OUT} + 0.2V ≤ V _{IN} ≤ 12.6V		83	300	μV/V
Load Regulation	ΔV _{OUT} / ΔI _{OUT}	Sourcing: 0 ≤ I _{OUT} ≤ 5mA		0.5	0.9	mV/mA
		Sinking: -2mA ≤ I _{OUT} ≤ 0		1.8	5	
OUT Short-Circuit Current	I _{SC}	Short to GND		110		mA
		Short to IN		25		
Long-Term Stability	ΔV _{OUT} / time	1000hr at +25°C		80		ppm/ 1000hr
Output Voltage Hysteresis (Note 3)	ΔV _{OUT} / cycle			125		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e _{OUT}	f = 0.1Hz to 10Hz		35		μVp-p
		f = 10Hz to 10kHz		40		μVRMS
Ripple Rejection	V _{OUT} /V _{IN}	V _{IN} = 5V ±100mV, f = 120Hz		76		dB
Turn-On Settling Time	t _R	V _{OUT} to 0.1% of final value, C _{OUT} = 50pF		115		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V _{IN}	Guaranteed by line-regulation test	V _{OUT} + 0.2	12.6		V
Quiescent Supply Current	I _{IN}		100	120		μA
Change in Supply Current	ΔI _{IN} /ΔV _{IN}	V _{OUT} + 0.2V ≤ V _{IN} ≤ 12.6V	3.2	8.0		μA/V

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6164 (V_{OUT} = 4.096V)

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V _{OUT}	T _A = +25°C	MAX6164A	4.094	4.096	4.098	V
			MAX6164B	4.091	4.096	4.101	
Output Voltage Temperature Coefficient (Note 2)	TCV _{OUT}	MAX6164A		2	5		ppm/°C
		MAX6164B		4	10		
Dropout Voltage (Note 4)	V _{IN} - V _{OUT}	I _{OUT} = 1mA		50	200		mV
Line Regulation	ΔV _{OUT} / ΔV _{IN}	V _{OUT} + 0.2V ≤ V _{IN} ≤ 12.6V		140	300		μV/V
Load Regulation	ΔV _{OUT} / ΔI _{OUT}	Sourcing: 0 ≤ I _{OUT} ≤ 5mA		0.6	0.9		mV/mA
		Sinking: -2mA ≤ I _{OUT} ≤ 0		2.0	7.0		
OUT Short-Circuit Current	I _{SC}	Short to GND		110			mA
		Short to IN		25			
Long-Term Stability	ΔV _{OUT} / time	1000hr at +25°C		80			ppm/ 1000hr
Output Voltage Hysteresis (Note 3)	ΔV _{OUT} / cycle			125			ppm
DYNAMIC CHARACTERISTICS							
Noise Voltage	e _{OUT}	f = 0.1Hz to 10Hz		50			μV _{p-p}
		f = 10Hz to 10kHz		50			μVRMS
Ripple Rejection	V _{OUT} /V _{IN}	V _{IN} = 5V ±100mV, f = 120Hz		72			dB
Turn-On Settling Time	t _R	V _{OUT} to 0.1% of final value, C _{OUT} = 50pF		190			μs
INPUT CHARACTERISTICS							
Supply Voltage Range	V _{IN}	Guaranteed by line-regulation test		V _{OUT} + 0.2	12.6		V
Quiescent Supply Current	I _{IN}			100	120		μA
Change in Supply Current	ΔI _{IN} /ΔV _{IN}	V _{OUT} + 0.2V ≤ V _{IN} ≤ 12.6V		3.2	8.0		μA/V

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6167 (V_{OUT} = 4.500V)

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V _{OUT}	T _A = +25°C	MAX6167A	4.498	4.500	4.502
			MAX6167B	4.495	4.500	4.505
Output Voltage Temperature Coefficient (Note 2)	TCV _{OUT}	MAX6167A		2	5	ppm/°C
		MAX6167B		4	10	
Dropout Voltage (Note 4)	V _{IN} - V _{OUT}	I _{OUT} = 1mA		50	200	mV
Line Regulation	ΔV _{OUT} / ΔV _{IN}	V _{OUT} + 0.2V ≤ V _{IN} ≤ 12.6V		160	450	μV/V
Load Regulation	ΔV _{OUT} / ΔI _{OUT}	Sourcing: 0 ≤ I _{OUT} ≤ 5mA		0.6	0.9	mV/mA
		Sinking: -2mA ≤ I _{OUT} ≤ 0		2.3	8.0	
OUT Short-Circuit Current	I _{SC}	Short to GND		110		mA
		Short to IN		25		
Long-Term Stability	ΔV _{OUT} / time	1000hr at +25°C		80		ppm/ 1000hr
Output Voltage Hysteresis (Note 3)	ΔV _{OUT} / cycle			125		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e _{OUT}	f = 0.1Hz to 10Hz		55		μVp-p
		f = 10Hz to 10kHz		55		μVRMS
Ripple Rejection	V _{OUT} /V _{IN}	V _{IN} = 5V ±100mV, f = 120Hz		70		dB
Turn-On Settling Time	t _R	V _{OUT} to 0.1% of final value, C _{OUT} = 50pF		230		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V _{IN}	Guaranteed by line-regulation test	V _{OUT} + 0.2	12.6		V
Quiescent Supply Current	I _{IN}			100	120	μA
Change in Supply Current	ΔI _{IN} /ΔV _{IN}	V _{OUT} + 0.2V ≤ V _{IN} ≤ 12.6V		3.1	8.0	μA/V

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6165 (V_{OUT} = 5.000V)

(V_{IN} = +5.5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V _{OUT}	T _A = +25°C	MAX6165A	4.998	5.000	5.002
			MAX6165B	4.995	5.000	5.005
Output Voltage Temperature Coefficient (Note 2)	TCV _{OUT}	MAX6165A		2	5	ppm/°C
		MAX6165B		4	10	
Dropout Voltage (Note 4)	V _{IN} - V _{OUT}	I _{OUT} = 1mA	50	200	500	mV
Line Regulation	ΔV _{OUT} /	V _{OUT} + 0.2V ≤ V _{IN} ≤ 12.6V	180	400	1000	μV/V
Load Regulation	ΔV _{OUT} /ΔI _{OUT}	Sourcing: 0 ≤ I _{OUT} ≤ 5mA	0.6	0.9	1.2	mV/mA
		Sinking: -2mA ≤ I _{OUT} ≤ 0	2.4	8.0	20	
OUT Short-Circuit Current	I _{SC}	Short to GND	110	150	200	mA
		Short to IN	25	35	50	
Long-Term Stability	ΔV _{OUT} /time	1000hr at +25°C	80	100	150	ppm/1000hr
Output Voltage Hysteresis (Note 3)	ΔV _{OUT} /cycle		125	150	200	ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e _{OUT}	f = 0.1Hz to 10Hz	60	80	100	μVp-p
		f = 10Hz to 10kHz	60	80	100	μVRMS
Ripple Rejection	V _{OUT} /V _{IN}	V _{IN} = 5.5V ±100mV, f = 120Hz	65	80	95	dB
Turn-On Settling Time	t _R	V _{OUT} to 0.1% of final value, C _{OUT} = 50pF	300	400	500	μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V _{IN}	Guaranteed by line-regulation test	V _{OUT} + 0.2	12.6	15.0	V
Quiescent Supply Current	I _{IN}		100	120	150	μA
Change in Supply Current	ΔI _{IN} /ΔV _{IN}	V _{OUT} + 0.2V ≤ V _{IN} ≤ 12.6V	3.1	8.0	20	μA/V

Note 1: 100% production tested at T_A = +25°C. Guaranteed by design for T_A = -40°C to +85°C.

Note 2: Temperature Coefficient is specified by the “box” method; i.e., the maximum ΔV_{OUT} is divided by the maximum ΔT.










Note 3: Thermal Hysteresis is defined as the change in T_A = +25°C output voltage before and after temperature cycling of the device (from T_A = T_{MIN} to T_{MAX}). Initial measurement at T_A = +25°C is followed by temperature cycling the device to T_A = +85°C then to T_A = -40°C, and another measurement at T_A = +25°C is compared to the original measurement at T_A = +25°C.

Note 4: Dropout voltage is the minimum input voltage at which V_{OUT} changes ≤ 0.2% from V_{OUT} at V_{IN} = 5.0V (V_{IN} = 5.5V for MAX6165).

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

Typical Operating Characteristics










($V_{IN} = +5V$ for MAX6161–MAX6168, $V_{IN} = +5.5V$ for MAX6165, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.) (Note 5)

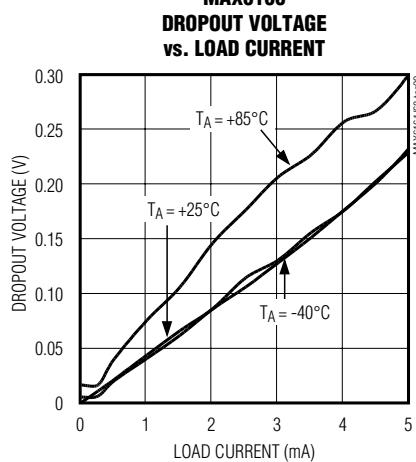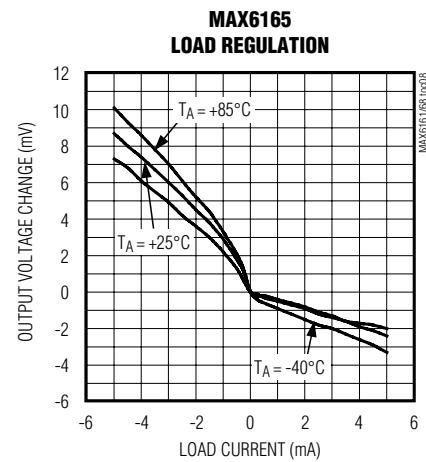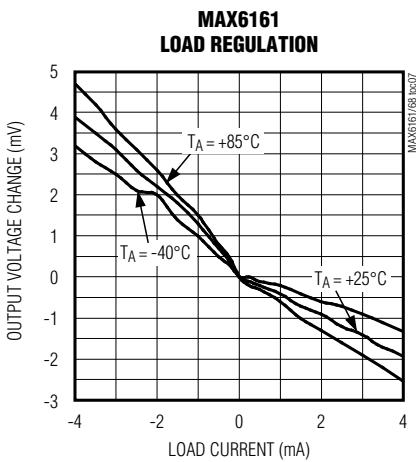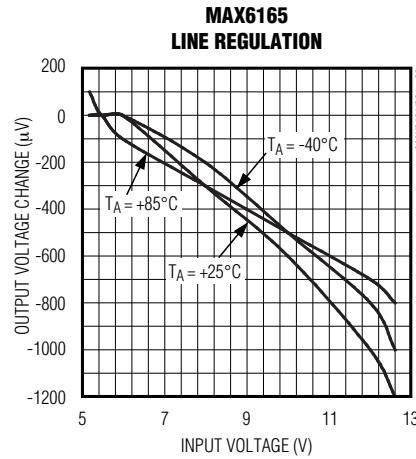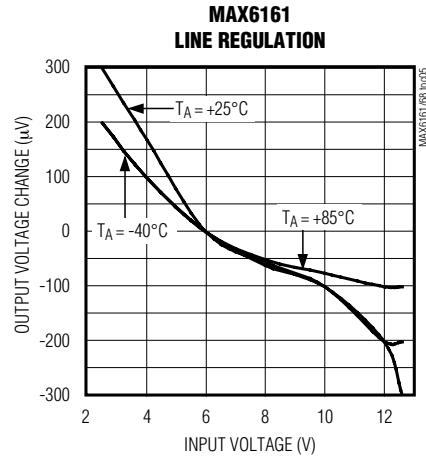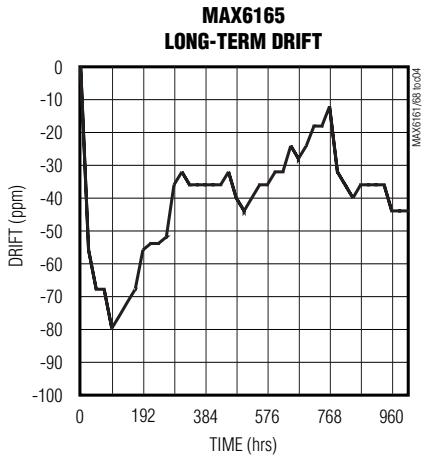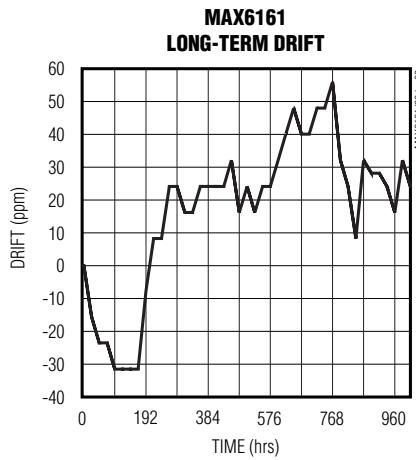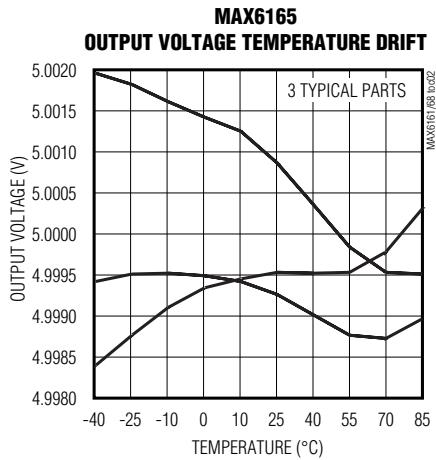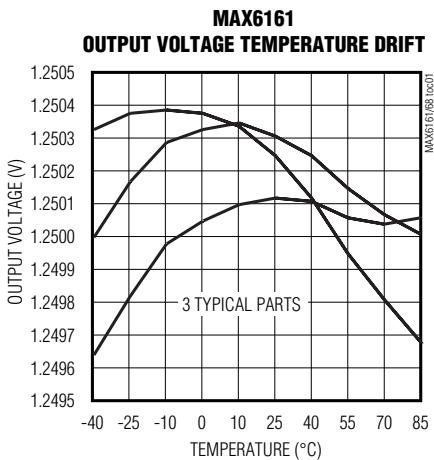

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

Typical Operating Characteristics (continued)

($V_{IN} = +5V$ for MAX6161–MAX6168, $V_{IN} = +5.5V$ for MAX6165, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.) (Note 5)

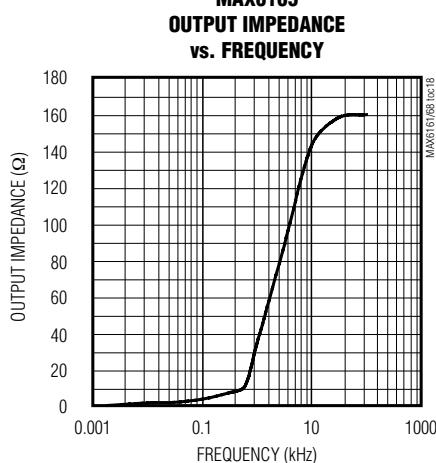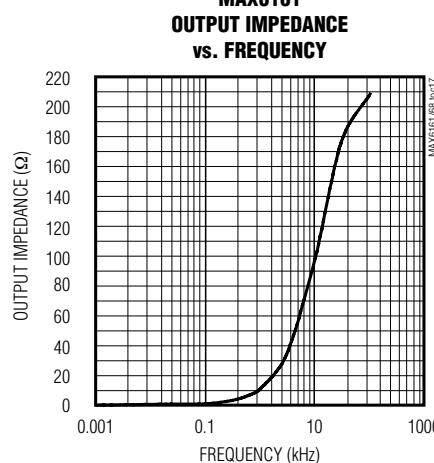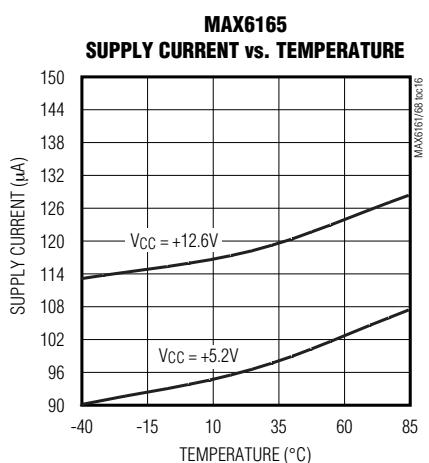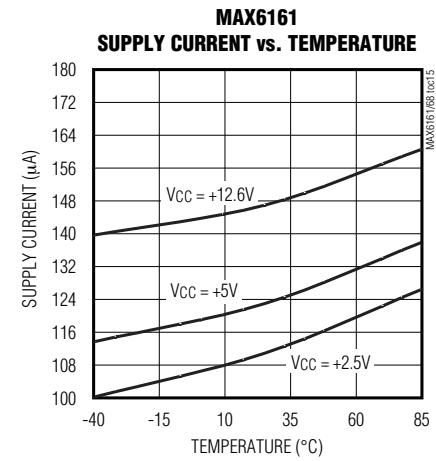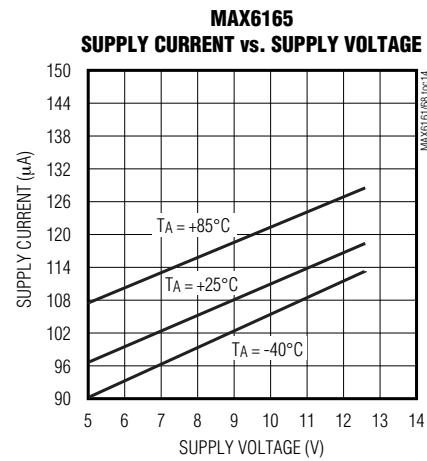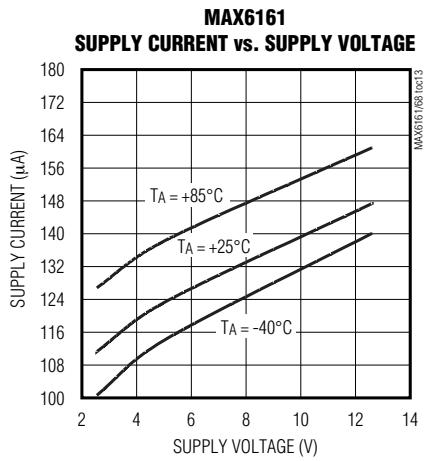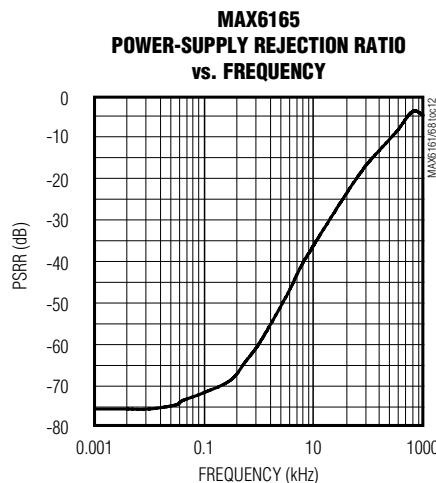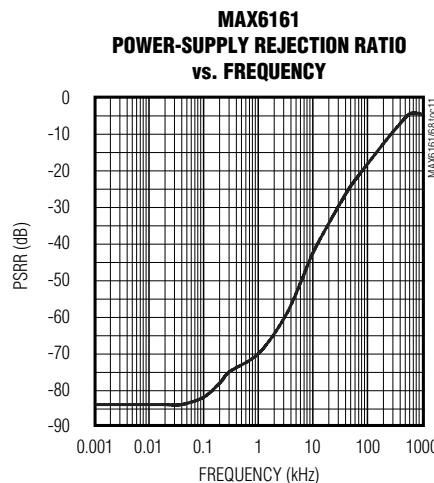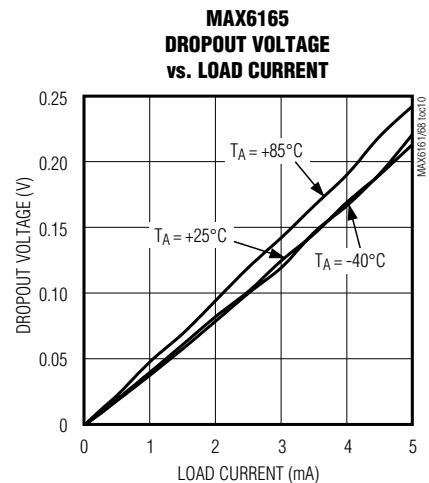


MAX6161–MAX6168

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

Typical Operating Characteristics (continued)







($V_{IN} = +5V$ for MAX6161–MAX6168, $V_{IN} = +5.5V$ for MAX6165, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.) (Note 5)

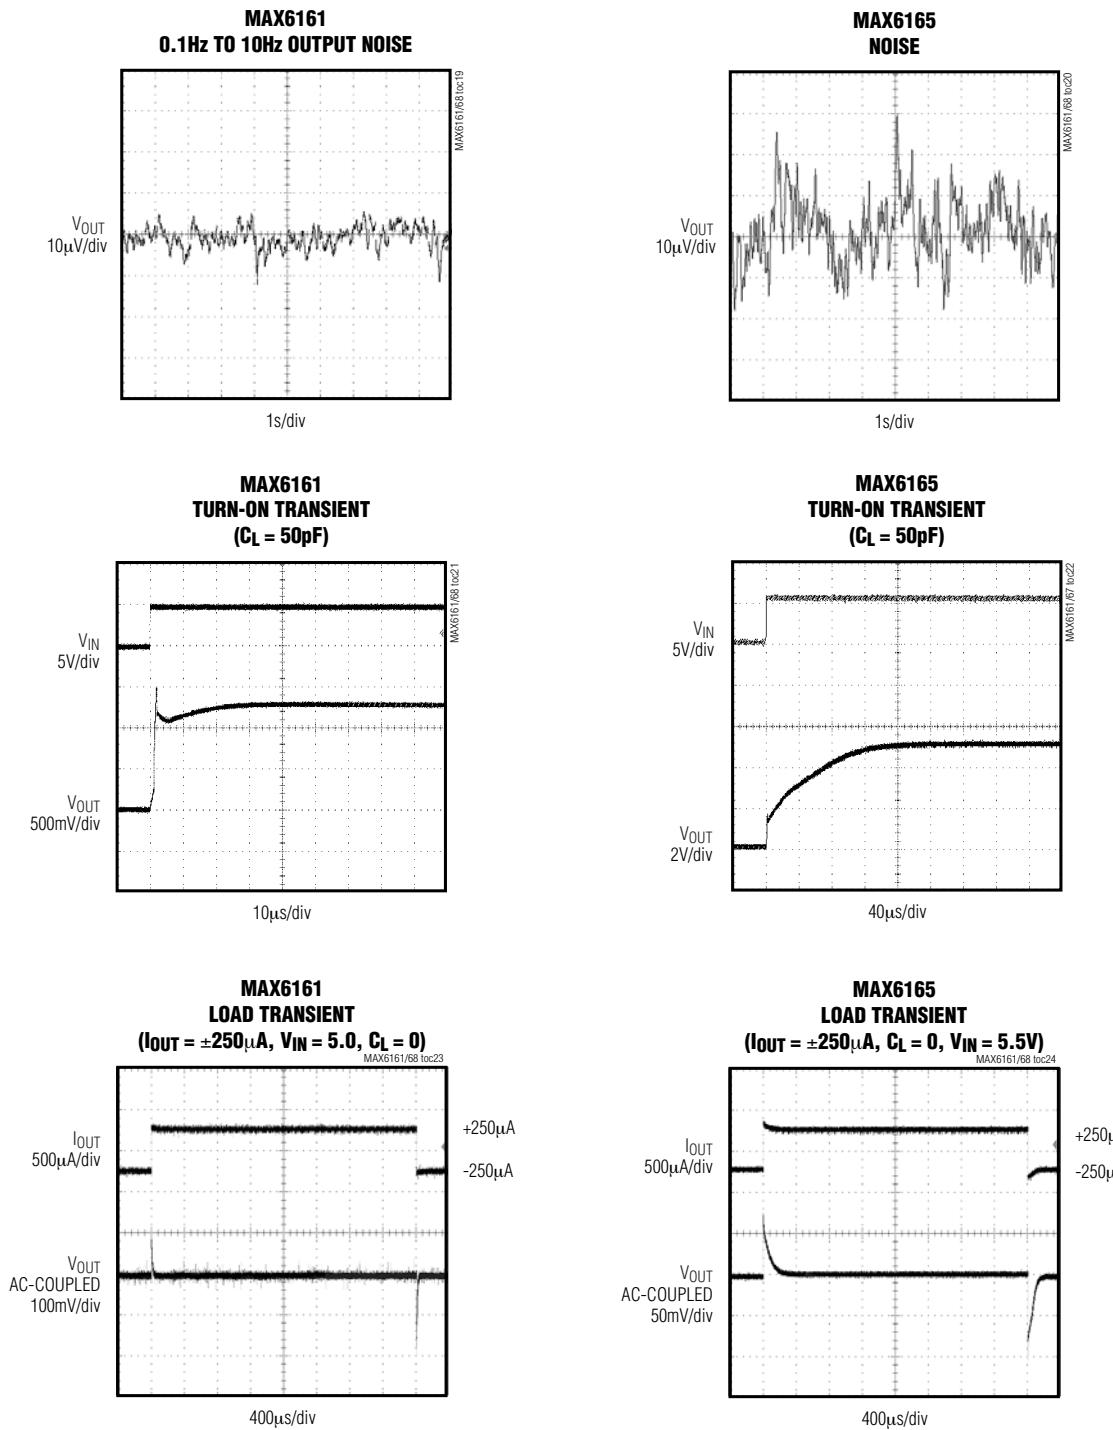

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

Typical Operating Characteristics (continued)







($V_{IN} = +5V$ for MAX6161–MAX6168, $V_{IN} = +5.5V$ for MAX6165, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.) (Note 5)

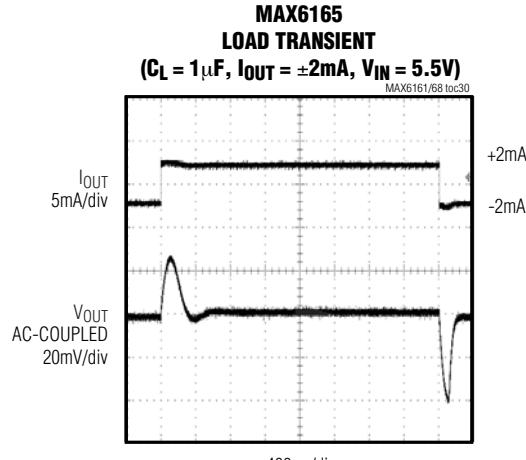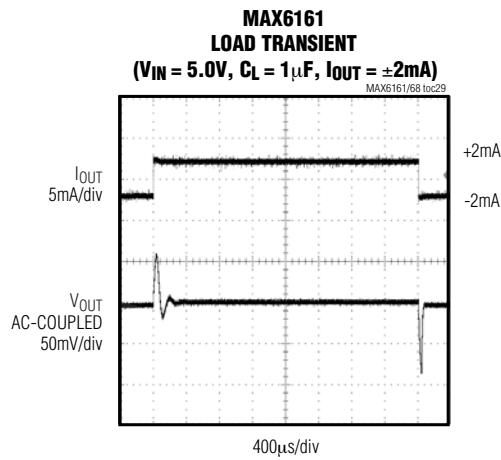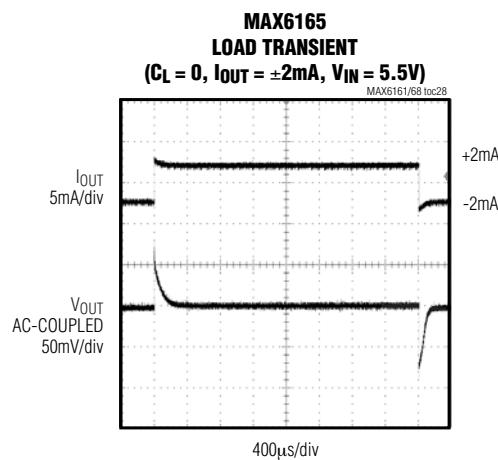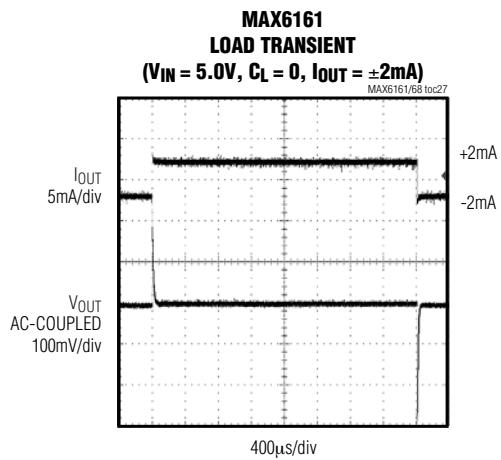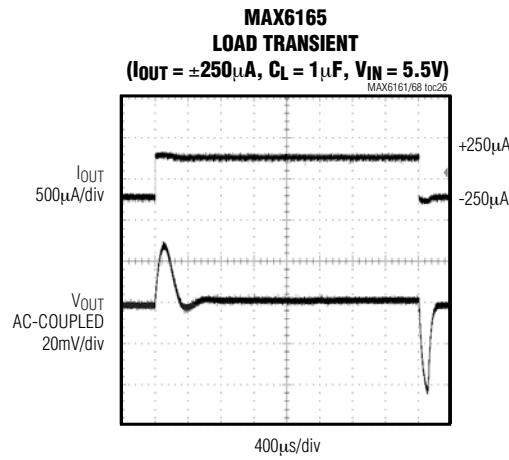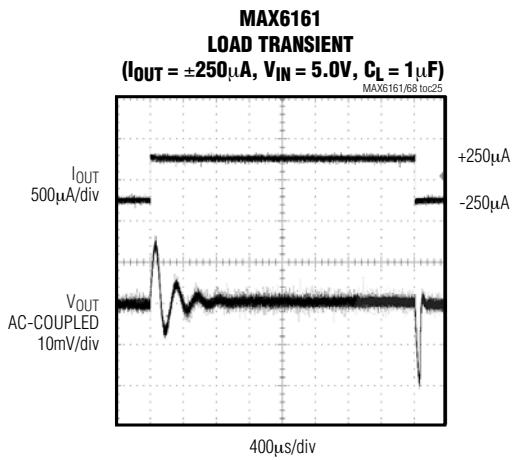

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

Typical Operating Characteristics (continued)

($V_{IN} = +5V$ for MAX6161–MAX6168, $V_{IN} = +5.5V$ for MAX6165, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.) (Note 5)

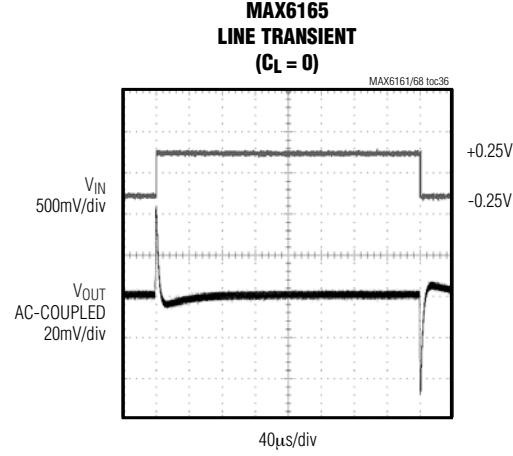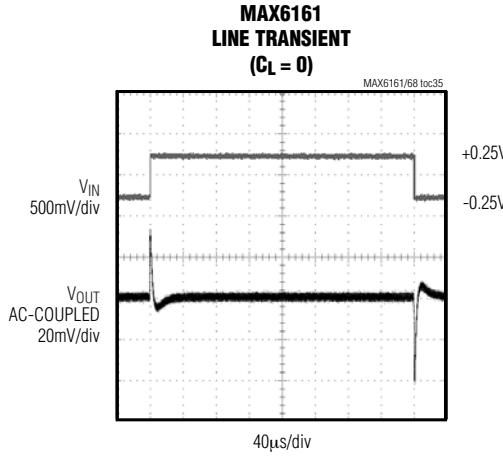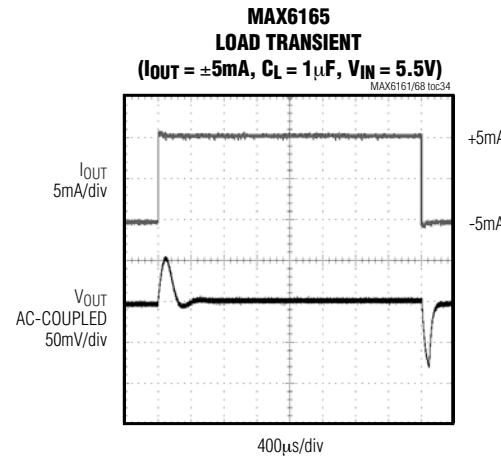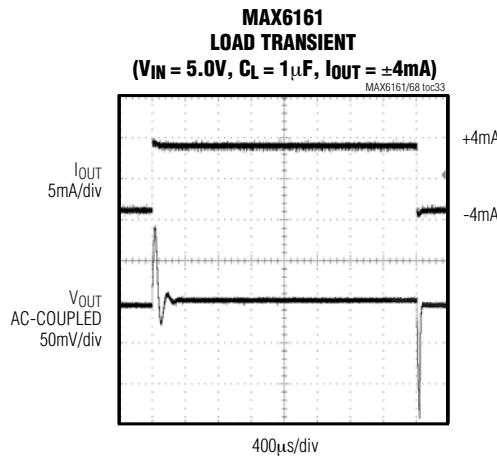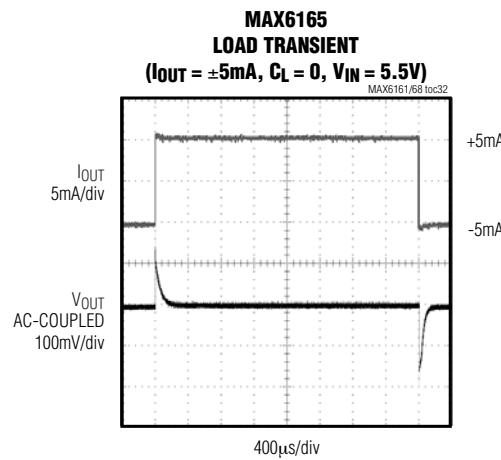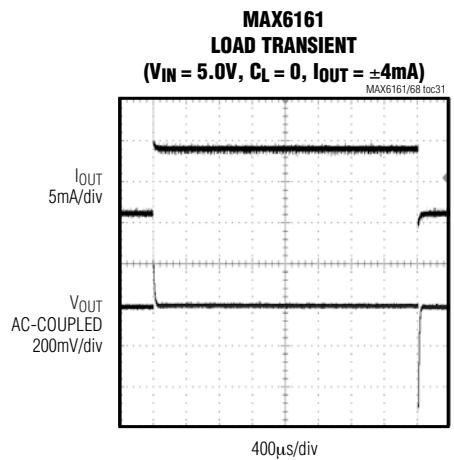

Note 5: Many of the *Typical Operating Characteristics* of the MAX6161 family are extremely similar. The extremes of these characteristics are found in the MAX6161 (1.25V output) and the MAX6165 (5.0V output). The *Typical Operating Characteristics* of the remainder of the MAX6161 family typically lie between these two extremes and can be estimated based on their output voltages.

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

Pin Description

PIN	NAME	FUNCTION
1, 3, 5, 7, 8	N.C.	No Connection. Not internally connected.
2	IN	Input Voltage
4	GND	Ground
6	OUT	Reference Output

Applications Information

Input Bypassing

For the best line-transient performance, decouple the input with a 0.1µF ceramic capacitor as shown in the *Typical Operating Circuit*. Locate the capacitor as close to IN as possible. When transient performance is less important, no capacitor is necessary.

Output/Load Capacitance

Devices in the MAX6161 family do not require an output capacitor for frequency stability. In applications where the load or the supply can experience step changes, an output capacitor of at least 0.1µF will reduce the amount of overshoot (undershoot) and improve the circuit's transient response. Many applications do not require an external capacitor, and the MAX6161 family can offer a significant advantage in applications when board space is critical.

Supply Current

The quiescent supply current of the series-mode MAX6161 family is typically 100µA and is virtually independent of the supply voltage, with only an 8µA/V (max) variation with supply voltage. Unlike series references, shunt-mode references operate with a series resistor connected to the power supply. The quiescent current of a shunt-mode reference is thus a function of the input voltage. Additionally, shunt-mode references have to be biased at the maximum expected load current, even if the load current is not present at the time. In the MAX6161 family, the load current is drawn from the input voltage only when required, so supply current is not wasted and efficiency is maximized at all input voltages. This improved efficiency reduces power dissipation and extends battery life.

When the supply voltage is below the minimum specified input voltage (as during turn-on), the devices can draw up to 400µA beyond the nominal supply current. The input voltage source must be capable of providing this current to ensure reliable turn-on.


Output Voltage Hysteresis

Output voltage hysteresis is the change in the input voltage at $T_A = +25^\circ\text{C}$ before and after the device is cycled over its entire operating temperature range. Hysteresis is caused by differential package stress appearing across the bandgap core transistors. The typical temperature hysteresis value is 125ppm.

Turn-On Time

These devices typically turn on and settle to within 0.1% of their final value in 50µs to 300µs, depending on the output voltage (see electrical table of part used). The turn-on time can increase up to 1.5ms with the device operating at the minimum dropout voltage and the maximum load.

Typical Operating Circuit

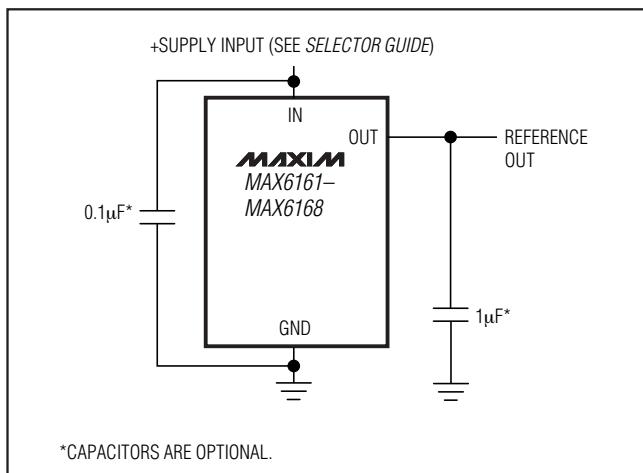

Chip Information

TRANSISTOR COUNT: 117

PROCESS: BiCMOS

MAX6161–MAX6168

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References


Selector Guide

PART	OUTPUT VOLTAGE (V)	INITIAL ACCURACY (mV)	TEMPERATURE COEFFICIENT (ppm/°C)
MAX6161A	1.250	±2	10
MAX6161B	1.250	±4	15
MAX6168A	1.800	±2	5
MAX6168B	1.800	±5	10
MAX6162A	2.048	±2	5
MAX6162B	2.048	±5	10
MAX6166A	2.500	±2	5
MAX6166B	2.500	±5	10
MAX6163A	3.000	±2	5
MAX6163B	3.000	±5	10
MAX6164A	4.096	±2	5
MAX6164B	4.096	±5	10
MAX6167A	4.500	±2	5
MAX6167B	4.500	±5	10
MAX6165A	5.000	±2	5
MAX6165B	5.000	±5	10

Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

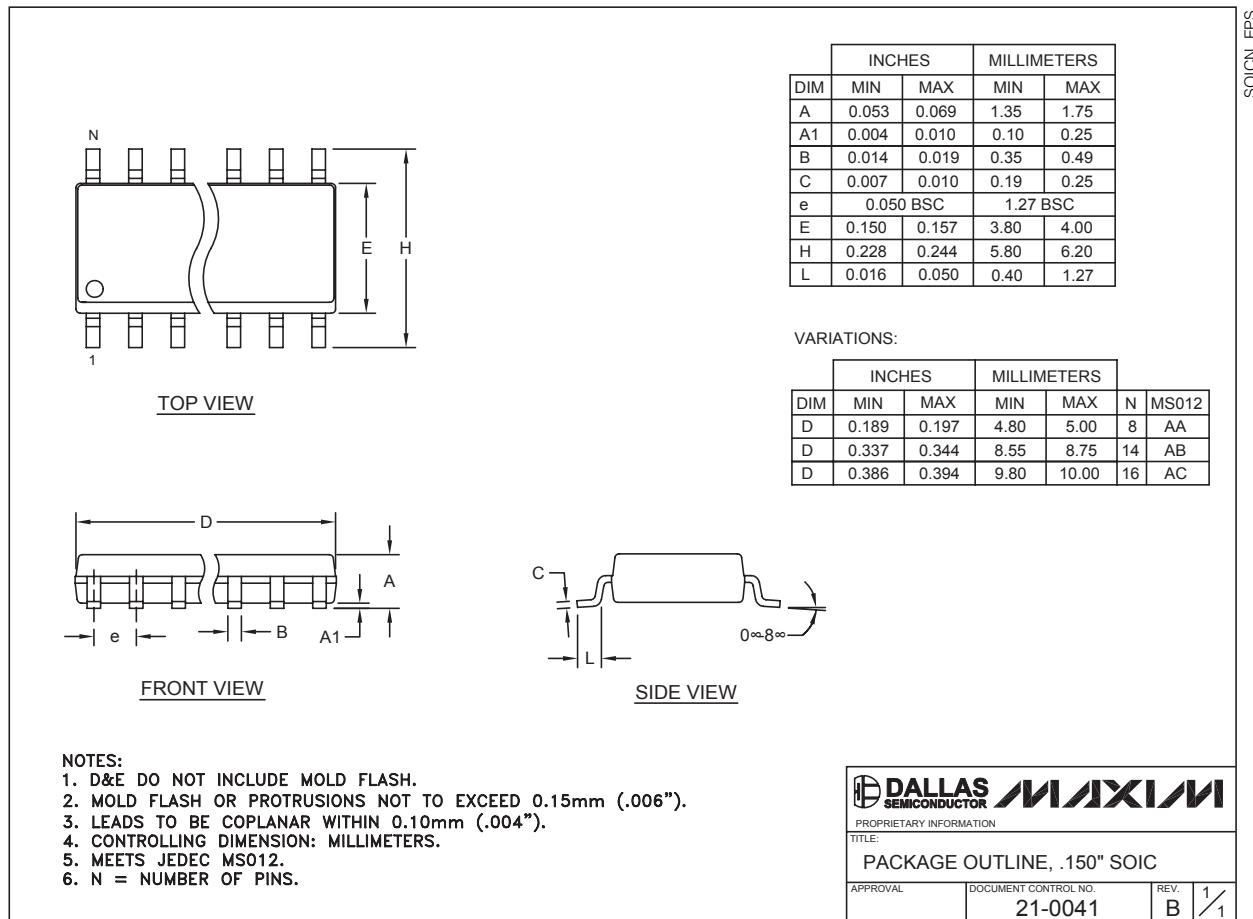

SOICN.EPS

MAX6161–MAX6168

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600

17