
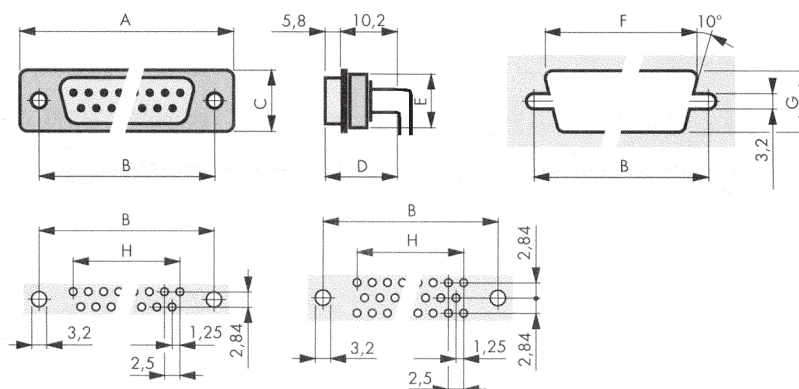


**SUB-D KONEKTORI . . . . . UTSD**  
**SUB-D KONEKTORI ZA ŠTAMPANU PLOČU - UGAONI 90° . . . . . UTSDU**

**Tehnički podaci**

Izolacioni materijal: poliamid  
 Kućište: čelik – pocinkovan  
 Kontakti: mesing, zlato na niklu  
 Dopuštena struja po kontaktu: 5A max.  
 Radni napon: 125 V<sub>eff</sub>  
 Ispitni napon: 1000V, 50Hz, 1min.  
 Prolazni otpor: ≤ 3 x 10<sup>-3</sup> Ω  
 Radna temperatura: -55... +125°C

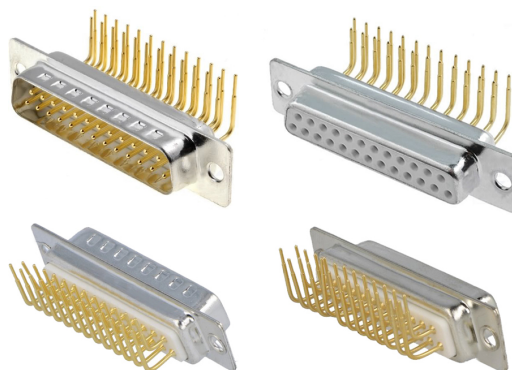

	Tip	Pol	Dimenzije u mm								
			A	B	C	D	E	F	G	H	K
<b>Muški</b>	<b>M09</b>	9	30,8	25,0	12,5	16,0	11,0	18,2	10,0	10,96	1,37
	<b>M15</b>	15	39,2	33,3	12,5	16,0	11,4	26,6	10,0	19,18	1,37
	<b>M25</b>	25	53,0	47,1	12,5	16,0	11,3	40,0	10,0	33,12	1,38
	<b>M37</b>	37	69,3	63,5	12,5	16,0	11,3	56,6	10,0	49,68	1,38
	<b>M50</b>	50	66,9	61,1	15,4	16,0	15,0	54,5	12,8	44,16	1,38
<b>Zenski</b>	<b>Z09</b>	9	30,8	25,0	12,5	16,0	11,0	16,6	8,0	10,96	1,37
	<b>Z15</b>	15	39,2	33,3	12,5	16,0	11,4	25,0	8,0	19,18	1,37
	<b>Z25</b>	25	53,0	47,1	12,5	16,0	11,3	39,2	8,0	33,12	1,38
	<b>Z37</b>	37	69,3	63,5	12,5	16,0	11,3	55,0	8,0	49,68	1,38
	<b>Z50</b>	50	66,9	61,1	15,4	16,0	15,0	52,6	11,4	44,16	1,38