


**SUB-D KONEKTORI . . . . . UTSD**  
**SUB-D KONEKTORI HD (HIGH DENSITY) . . . . . UTSDHD**

**Tehnički podaci**

Prolazni otpor: < 5 mΩ  
 Otpor izolacije: > 5 × 10<sup>9</sup> Ω  
 Kapacitet: ≤ 5 pF na 1 MHz  
 Ispitni napon: 1000 V  
 Radni napon: 250 V  
 Struja: 1,5 A  
 Nozica: bakar-berilijum  
 0,1 μm zlato na niklu  
 Utičnica: fosfor-bronza  
 0,1 μm zlato na niklu  
 Radna temperatura: -55... +105°C

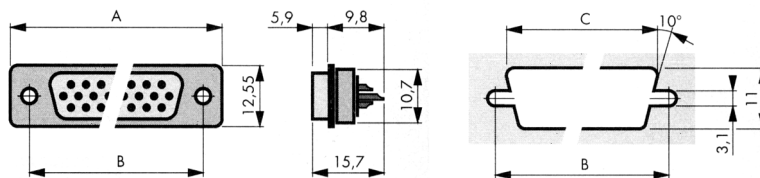

|               | Tip        | Pol | Dimenzije u mm |       |       |
|---------------|------------|-----|----------------|-------|-------|
|               |            |     | A              | B     | C     |
| <b>Muški</b>  | <b>M15</b> | 15  | 30,80          | 24,99 | 16,90 |
|               | <b>M44</b> | 44  | 53,00          | 47,04 | 39,00 |
| <b>Zenski</b> | <b>Z15</b> | 15  | 30,80          | 24,99 | 16,90 |
|               | <b>Z44</b> | 44  | 53,00          | 47,04 | 39,00 |