


AMP MIKRO KONEKTORI UTKM

Tehnički podaci

Izolacioni materijal: Termoplastika
 Kontakti: Mesing, niklovani
 Struja po kontaktu: 1,5 A
 Radni napon: 230 V
 Otpor izolacije: 1000 MΩ
 Radna temperatura: -55... +105°C


KABLOVSKI, ZENSKI . . . UTKMKZ

Tip	Pol	Dimenzije u mm		
		A	B	C
04	4	8,6	5,4	3,81
06	6	11,1	8,0	6,35
08	8	13,6	10,5	8,89
10	10	16,2	13,0	11,43
12	12	18,7	15,6	13,97
14	14	21,3	18,1	16,51
16	16	23,8	20,7	19,05
20	20	28,9	25,7	24,13


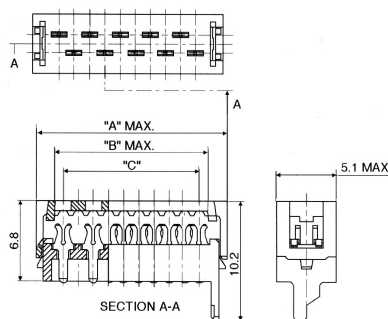


PRINT, MUŠKI UTKMPM

Tip	Pol	Dimenzije u mm	
		A	B
04	4	3,81	7,1
06	6	6,35	9,7
08	8	8,89	12,2
10	10	11,43	14,7
12	12	13,97	17,3
14	14	16,51	19,8
16	16	19,05	22,4
20	20	24,13	27,4




Raster: 1,27mm



PRINT, ZENSKI UTKMPZ

Tip	Pol	Dimenzije u mm	
		A	B
04	4	3,81	7,1
06	6	6,35	9,7
08	8	8,89	12,2
10	10	11,43	14,7
12	12	13,97	17,3
14	14	16,51	19,8
16	16	19,05	22,4
20	20	24,13	27,4

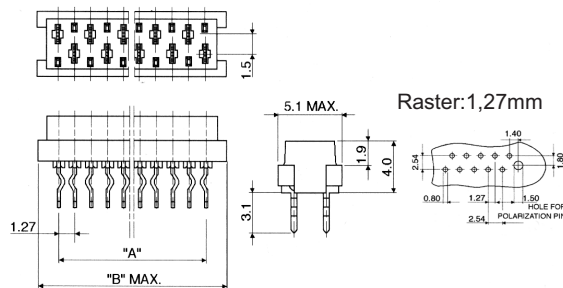

Raster: 1,27mm