


LZ15-GW21-B

Features

- 1.Rating: 15A 125/250VAC
- 2.Various actuator are available
- 3.High precision, fast action
- 4.High mechanical strength
- 5.Long life, stable and reliable
- 6.CCC,CE,UL approvals

Application Area

Widely applied in machinery,production line,elevator equipment etc.

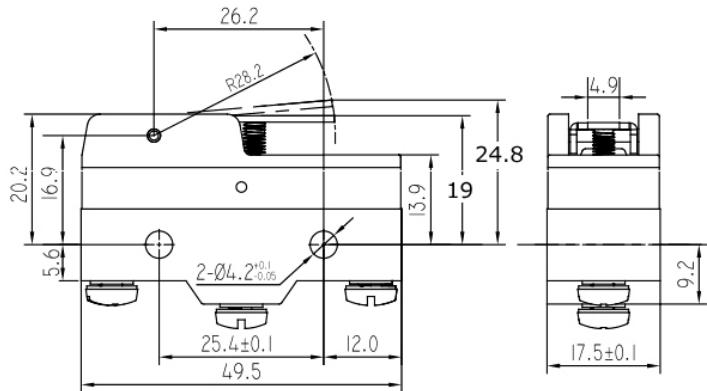

Rating	15A 125/250VAC	
Initial contact resistance	25mΩ max.	
Initial insulation resistance	100MΩ min. (at 500VDC)	
Dielectric strength	Between non-consecutive terminals	1000Vrms, 50/60Hz for 1 min
	Between non-current carrying metal parts and each terminal	2000Vrms, 50/60Hz for 1 min
	Between ground and each terminal	2000Vrms, 50/60Hz for 1 min
Max.shock resistance	Destruction	1000m/s ² max.
	Malfunction	300m/s ² max.
Vibration resistance	10-55Hz,1.5mm double amplitude	
Operating life	Mechanical life	1,000,000 operations min.
	Electrical life	100,000 operations min.
Ambient temperature	-25°C to +85°C	
Ambient humidity	85% RH max.	
Operating frequency	Mechanical	240 operation/min
	Electrical	20 operation/min
Operating speed	0.01mm-1m/s	
Protection degree	IP40	